
XWire[™] Next Generation Guidewire



Applied Ingenuity

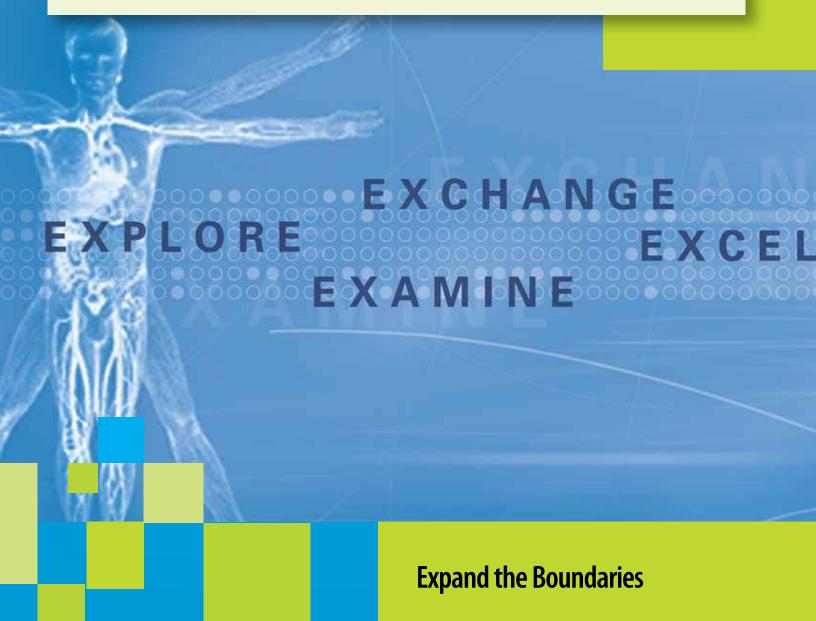


Explore


■ Tapered Distal 20cm

 Provides optimum flexibility for effective transition across the elevator of the duodenoscope

■ Hydrophilically Coated Floppy Distal Tip

 Lubricious coating enhances cannulation and stricture access capability

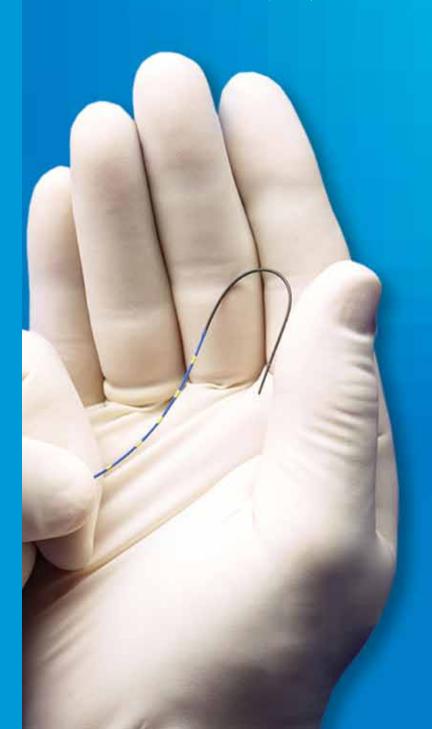



 The XWire™ is easily seen and provides excellent detection of movement while the three marker bands signal that approximately 15 centimeters of the wire are in the duct.

Examine

Radiopaque Floppy Tip

- Provides optimal fluoroscopic visibility
- 5 cm length enables fluoroscopic stricture measurement



 An example of the XWire™ maintaining access to the common bile duct. The three marker bands signal that approximately
15 centimeters of the wire are in the duct.

Exchange

- Proprietary REGILIANT™ Nitinol Core Composition
 - Optimized flexibility over distal 20 cm
 - Kink resistant, for maneuvering through torturous angles
 - Enhanced stiffness over entire exchange segment


PTFE Jacket

- Lubricous coating over wire jacket ensures smooth device transition
- Meets IEC 60601 standard for cutting over the guidewire

Excel

- Simple Yet Functional Endoscopic Measurement System
 - 1 cm spaced visual markings, extend 30 cm from wire tip
 - Helps detect inadvertent wire movement
 - Ideal color combination for easy visualization
 - Multiple markings every 5cm provide a simple, easy to decipher, endoscopic stricture measurement system



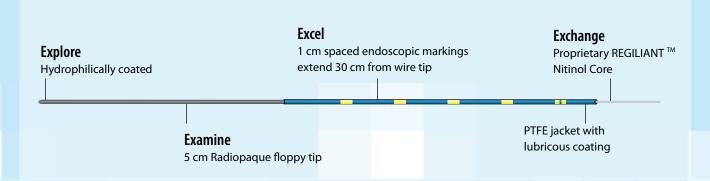

Ordering Information

Item Number	Wire Type	Guidewire O.D. inches	Length millimeters	Tip cm	Torque Type	Vise	Unit
035450S	Standard wire	.035"	.89mm	450cm	Straight tip	No	3/box
035450A	Standard wire	.035"	.89mm	450cm	Torquable angled tip	Yes	3/box
035260S	Standard wire	.035"	.89mm	260cm	Straight tip	No	3/box
035260A	Standard wire	.035"	.89mm	260cm	Torquable angled tip	Yes	3/box
035450SS	Stiff wire	.035″	.89mm	450cm	Straight tip	No	3/box
035450AS	Stiff wire	.035″	.89mm	450cm	Torquable angled tip	Yes	3/box
035260SS	Stiff wire	.035″	.89mm	260cm	Straight tip	No	3/box
035260AS	Stiff wire	.035"	.89mm	260cm	Torquable angled tip	Yes	3/box
025450S	Standard wire	.025"	.64mm	450cm	Straight tip	No	3/box
025450A	Standard wire	.025″	.64mm	450cm	Torquable angled tip	Yes	3/box
025260S	Standard wire	.025"	.64mm	260cm	Straight tip	No	3/box

CONMED CORPORATION PRODUCT AREAS:

ARTHROSCOPY • ELECTROSURGERY • ENDOSCOPY • ENDOSURGERY • GASTROENTEROLOGY • INTEGRATED SYSTEMS • PATIENT CARE • POWERED INSTRUMENTS • PULMONOLOGY



525 French Road Utica, NY 13502 (315) 797-8375

Customer Service: 1-800-448-6506

FAX: 1-800-438-3051

International Sales: +1(315) 797-8375 • FAX: +1(315) 735-6235

email: info@mail.conmed.com

www.conmed.com